


GS-16 GRADE RESAW SYSTEM

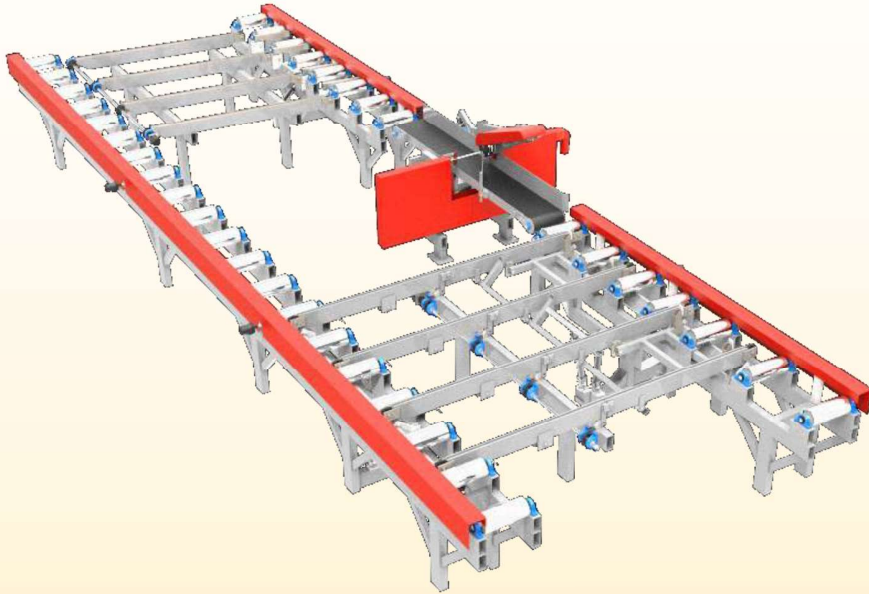

Thin Kerf sawing will yield up to 30% more yield over circle sawing, the Go Fast Go-Around Grade System is a heavy duty, high capacity, and economical solution for your grade sawing operation. This system comes complete: heavy duty built low profile saw, outfeed rolls with cant tipper, heavy duty cross over chains, infeed chains with turn, variable feed speed, quick adjust blade tracking and much more.


A BIG BANG FOR YOUR BUCK:
We provide a 16" x 16" x 16' capacity high production grade system for under \$200,000.

STANDARD FEATURES

**16" X 16" X 16' CAPACITY
GRADE SAW**

**COMPUTER CONTROL
NETWORKS**

CANT STOPS AND TURNERS

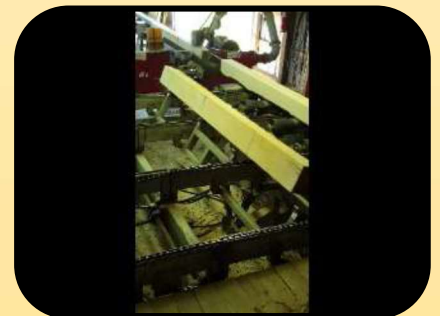

FEATURES & SPECS

OPTIONS

- Infeed Package Deck
- Longer Rollers & Transfer Chains
- Bi-Directional Cant Flipper
- Tailing Conveyors/Green Chains
- Board Edgers

MACHINE SPECS

Dimensions

- Length: 384"
- Width: 192"
- Feed Belt Height: 34"

Power

- Electric Blade Motor: 30 HP 208/230/480/3/60 TEFC
- Hydraulic Pump Motor 15 HP 208/230/480/3/60 TEFC

Specifications

- 6" Dust Connection (1200 cfm)
- Uses 17' 6" Bands (1/2" to 2" Wide)
- Top Mounted Roller Hold Down
- Heavy Duty 2-7/16" Arbors & Bearings
- 30" Band Wheels
- Self Contained Hydraulic System with Variable 0-180 Feed Per Minute Feed Speed

Capacities

- Board Width: up to 16"
- Board Thickness: 16"
- Board Length: Unlimited

POPULAR OPTIONS

CAB



LOADING DECKS



OUTFEED GREEN CHAIN

