



Model 4600N Board Stacker




Built-in reliability and performance.

Pendu 4600N Stackers are design-engineered and manufactured to deliver high performance and reliability in real-world applications. With the ability to handle a wide variety of sizes and shapes at rates up to 4,000 stringers/hour, every 4600N improves productivity while reducing labor and handling costs. And each 4600N is constructed with rugged components to stand up to the most demanding environments.

Specifications

Dimensions	67"H x 118"L x 33"W
Stack Size	Max. 48"W x 50"H x 96"L
Stack Rate	Max. 4,000 Stringers / Hour
Stack Lengths	24" x 96" depending on board thickness
Outtrigger Rails	Standard
Powered Transfer Chains	Standard

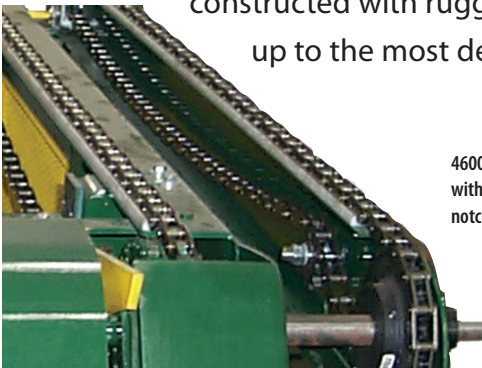

4600N Stackers are configured with two outtrigger rails to handle notched stringers.



*Designers and Manufacturers
of Specialized Equipment*