
Shaving Mills Conveyors Shavings Re-Sizer

Quality of Workmanship, Innovative Design, Built to Last!

MADE IN THE U.S.A



20" Mill, PTO Driven, Portable, No Blower

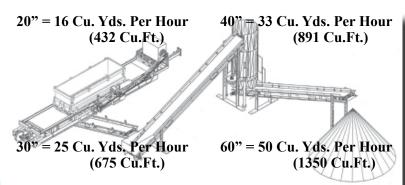



40" Mill, Electric Powered, Stationary, Conveyor Drop

Diesel, Electric, PTO! Portable or Stationary! Conveyor Drop or With a Blower!



30" Mill, Portable, 91HP Caterpillar Diesel Engine, with Blower

15" - 30" Wide Conveyors, 10' Long Increments! Shavings Re-Sizer!



40" Mill, 127HP Caterpillar Diesel Engine, Portable, Conveyor Drop, Shavings Re-Sizer & Conveyors



60" Mill, Stationary, 200HP Caterpillar Diesel Engine, **Conveyor Drop**



20" Shaving Mill

20" = 16 Cu. Yds. Per Hour (432 Cu.Ft.)

ALL MODELS UTILIZE HARDENED RAZOR BACKED **CUTTER KNIVES!**

> ALL ADJUSTING SHAFTS HAVE PUSHER SCREWS TO KEEP SHAFTS ALIGNED!



Pictured above-20" Mill, PTO Driven, Portable with a Blower.

20" MILL SPECIFICATIONS

8", I-Beam construction, continuous welds, with cross beams for added strength. FRAME:

Steel, completely re-enforced with 4" x 1-1/2" steel channel beams. 20" wide x 30" deep x 8'6" long. WOOD BOX:

DECK PLATE: 3/4" Thick steel plate.

Caterpillar, 50hp, Tier III, Diesel ENGINE:

Steel, 36" x 14" x 20", 43.6 gallons, cushioned, screw cap with dip stick. FUEL TANK: HYD. TANK: Steel, 26" x 18" x 9", 18 gallons, cushioned, screw cap with dip stick.

(Portable Unit)

AXLES: 7,000 lb., Torflex axles, electric brakes, with break-away TIRE/WHEELS: 225/75R15D, Load Range D, 8 Ply, Radial.

FENDERS: Heavy duty diamond plate steel, with light enclosures. DIMENSIONS: Length: 27'7"

Width: 7' (Portable) Height with Blower: 7'2"

Height to Top of Box: 5'6" (Portable) Weight: 9,600 lbs. (Approximately)



ALL FRAMES ARE CON-STRUCTED OF 8" I-BEAM, CONTINUOUS WELDS & CROSS BEAMS!

> ALL MODELS UTILIZE AUTO DIRECTION CONTROL **MECHANISMS!**





30" Shaving Mill

30" = 25 Cu. Yds. Per Hour (675 Cu.Ft.)

OPTIONAL REMOTE CONTROL & BOX DIVID-ER AVAILABLE ON ALL MODELS!

> SHAVINGS THICKNESS IS ADJUSTABLE IN ALL MODELS!

30" MILL SPECIFICATIONS

8", I-Beam construction, continuous welds, with cross beams for added strength. FRAME:

WOOD BOX: Steel, completely re-enforced, with 4" x 1-1/2" steel channel beams. 30" wide x 30" deep x 8'6" long.

DECK PLATE: 3/4" Thick steel plate.

Caterpillar, 91hp, Tier III, Diesel, John Deere, 83hp, Diesel ENGINES:

75hp on cutter, 10hp on hydraulics. ELEC. MOTORS:

FUEL TANK: Steel, 36" x 14" x 20", 43.6 gallon, cushioned, screw cap with dip stick. Length: 25' Steel, 26" x 18" x 9", 18 gallons, csushioned, screw cap with dip stick. HYD. TANK:

(Portable Unit)

7,000 lb., Torflex axles, electric brakes, with break-away. AXLES:

TIRE/WHEELS: 225/75R15D, Load Range D, 8 Ply, Radial.

FENDERS: Heavy duty diamond plate steel, with light enclosures. **DIMENSIONS:**

Width: 7'7" (Portable)

Height with Blower: 8'8" (Portable) Weight: 10,800 lbs. (Approximately)

Specifications & Options, subject to change without notice.

0" Shaving Mill

40" = 33 Cu. Yds. Per Hour (891 Cu.Ft.)



ALL MODELS HAVE SAFETY STOP SWITCHES TO PRE-VENT OVER TRAVEL OF THE WOOD BOX!



40" MILL SPECIFICATIONS

8", I-Beam construction, continuous welds, with cross beams for added strength. FRAME:

WOOD BOX: Steel, completely re-enforced with 4" x 1-1/2" steel channel beams. 30" wide x 30" deep x 8'6" long.

3/4" Thick steel plate. DECK PLATE:

ENGINE: Caterpillar, 127hp, Tier III, Diesel 125hp on cutter, 15hp on hydraulics. ELEC. MOTORS:

Steel, 36" x 14" x 20", 43.6 gallons, cushioned, screw cap with dip stick. FUEL TANK: Length: 30' Steel, 26" x 18" x 9", 18 gallons, cushioned, screw cap with dip stick. HYD. TANK:

(Portable Unit)

7,000 lb., Torflex axles, electric brakes, with break-away. AXLES: TIRE/WHEELS: 225/75R15D, Load Range D, 8 Ply, Radial.

Heavy duty diamond plate steel, with light enclosures. FENDERS:

DIMENSIONS:

Width: 7'6" (Portable)

Height with Blower: 8'8" (Portable)

Height to Top of Box: 5'6" Weight: 11,500 (Approximately)



ALL SIZE BOXES ARE CONSTRUCTED OF 1/4" & 1/2" THICK STEEL WALLS AND ARE COM-PLETELY RE-ENFORCED WITH STEEL CHANNEL BEAMS.

ALL MODELS ARE **EQUIPPED WITH EMERGENCY** STOP SWITCHES!





60" Shaving Mill

60" = 50 Cu. Yds. Per Hour (1350 Cu.Ft.)

CUTTER SHAFTS ARE SPECIALLY **DESIGNED TO CUT** IN BOTH DIREC-TIONS & REMOVE



SHAVINGS THROUGHOUT THE CUT!

60" MILL SPECIFICATIONS

FRAME: 8", I-Beam construction, continuous welds, with cross beams for added strength.

Steel, completely re-enforced, with 4" x 1-1/2" steel channel beams. 60" wide x 30" deep x 9' long. WOOD BOX: DECK PLATE: 3/4" Thick steel plate. **DIMENSIONS:**

Caterpillar, 200hp, Tier III, Diesel ENGINE: Length: 26' 5"

ELEC. MOTORS: 125hp on cutter, 15hp on hydraulics. Width: 7'

Height to top of Engine Guard: 7'4"

Height to Top of Box: 6'


Weight: 15,000 (Approximately) Specifications & Options, subject to change without notice.

Shavings Re-Sizer & Conveyors



Shavings Conveyor dropped directly from Cutter Shaft, before going through Re-Sizer.

Shavings after going through Re-Sizer.







MANUFACTURER OF OUTDOOR POWER EQUIPMENT

Products for Turf & Lawncare, Rental, Construction, Tree Care, Wood Processing, Nursery & Farm Industries
Other Salsco Equipment

3-1/2" - 18" Capacity, Gas, Diesel, & P.T.O., Wood/Brush Chippers Blade Sharpener/Grinder

Chipper Shredder Vacuums - Tailgate & Truckloader Vacuums Mini-Asphalt Pavers, (Tracked & Rubber Tire) - Bale Wrappers & Bale Handlers



105 School House Road Cheshire, CT 06410 U.S.A. 800-872-5726 (Toll Free), 203-271-1682, 203-271-2596 (Fax) www.salsco.com, sales@salsco.com (email)